


# **DILOGIC**

## **CYF020**

### **DATA SHEET**

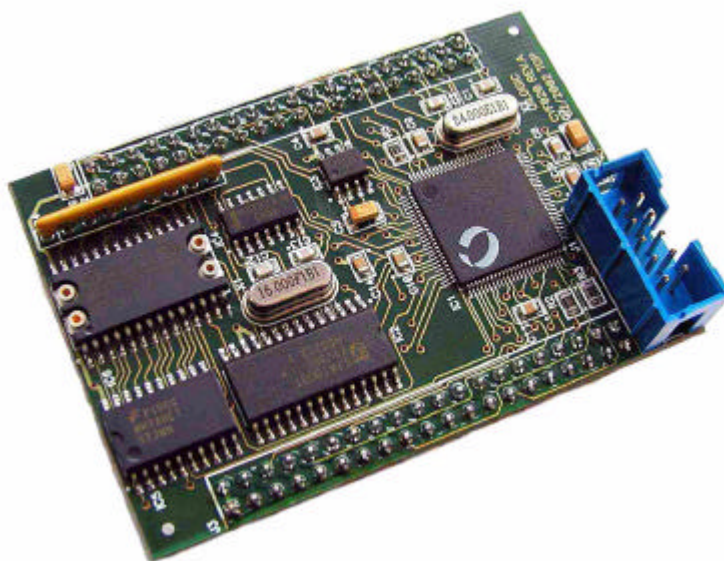

#### **CYF020**

Single Board Computer, Sub-credit Card Size (68x48mm)  
with Silicon Laboratories C8051F020 microcontroller.

Product specification

January, 2004

CYF020 Leaflet

Version 1.1

"DILOGIC"  
Zagrebacka 64  
10410 Velika Gorica  
Croatia

e-mail: [dilogic@zg.htnet.hr](mailto:dilogic@zg.htnet.hr)  
[www.dilogic.hr](http://www.dilogic.hr)  
phone: +385-1-6256-168  
fax: +385-1-6256-169

## DESCRIPTION

The **CYF020** is a Single Board Computer based on the Silicon Laboratories ([www.silabs.com](http://www.silabs.com)) C8051F020 microcontroller. C8051F020 is highly advanced System-On-Chip (SoC), containing single-clock-cycle 8051 compatible core, running up to 25MHz with up to 25MIPS throughput. In addition, there is 64KB of FLASH memory, 4KB of internal SRAM memory, 8-input 12-bit 100ksps A/D converter, 8-input 8-bit 500ksps A/D converter, 2 12-bit D/A converters, 2 analog comparators, 2.4V reference, 2 UART's, SPI™ bus controller, SMS (I<sup>2</sup>C™-compatible) bus controller, programmable counter array and 5 general purpose 16-bit timers. One of the unique features is the availability of non-intrusive **on-chip debug port via standard JTAG interface**, allowing also in-circuit FLASH programming !

Further information about C8051F020 is available from Silicon Laboratories web site ([http://www.silabs.com/products/pdf/C8051F020\\_Rev1\\_4.pdf](http://www.silabs.com/products/pdf/C8051F020_Rev1_4.pdf)).

**CYF020** is a **6-layer** PCB module and contains, in addition to C8051F020, 32KB of battery-backed SRAM, RTC, and CAN-controller. All free C8051F020 port pins are brought to two 2x20 pin headers with standard raster (2,54mm/0,1"). This allows plug-in of the module to the target application PCB.

Development board is available for quick development start.

## FEATURES

- SBC in Sub-credit Card size (68x48mm), SMD technology, 6-layer PCB for improved analog signal integrity
- Powerful Silicon Laboratories C8051F020 CPU running at 24.0 MHz
- **On-chip JTAG debug port !!!**
- 64KB FLASH
- 32KB battery-backed SRAM with replaceable Lithium battery pack
- RTC
- SJA1000 CAN 2.0 controller
- 12-bit ADC with 8 multiplexed inputs and programmable gain amplifier
- additional 8-bit ADC with 8 multiplexed inputs and programmable gain amplifier
- two voltage output 12-bit DAC's
- internal 2,4V reference voltage
- on-chip linear temperature sensor
- on-chip brown-out voltage detector
- on-chip watch-dog timer
- 2 full-duplex UART's
- SPI™-compatible serial interface
- SMS-bus serial interface (I<sup>2</sup>C™ compatible)
- Requires single 5V/50mA power supply
- Comes with FLASH loader via serial port
- Operates within a standard 0 to 70°C range
- Extended temperature range available on request

**BLOCK DIAGRAMS**

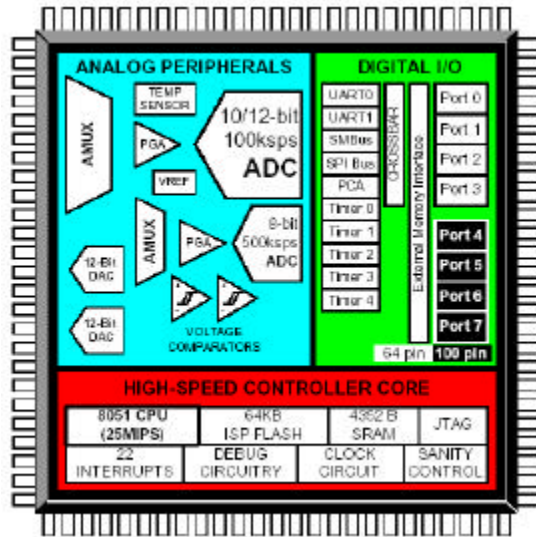


Fig.1 C8051F020 block diagram

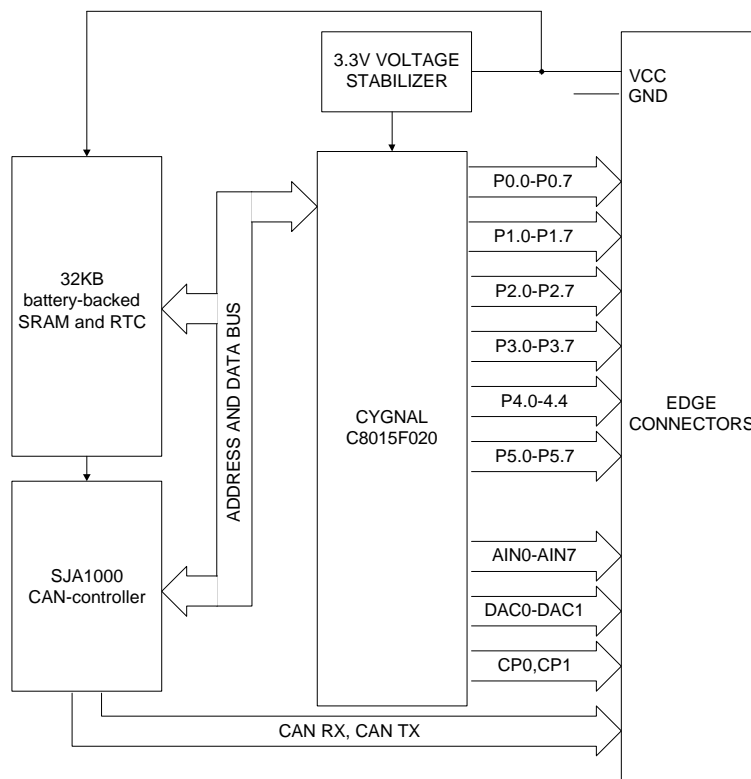


Fig.2 CYF020 block diagram

### MEMORY MAP

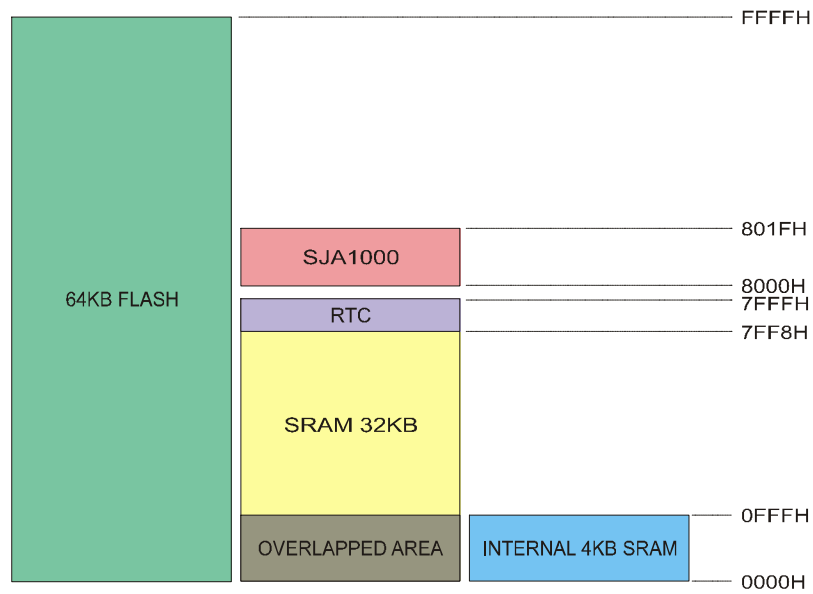


Fig.3 CYF020 memory map

### TOP VIEW

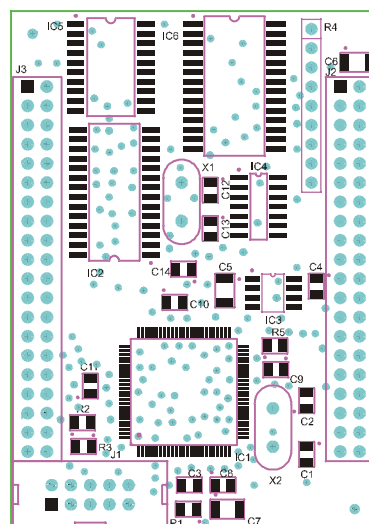


Fig.4 CYF020 top view

**CONNECTOR PINOUT****Connector J2**

Pin	Description
1.	VCC
2.	VCC
3.	GND
4.	GND
5.	P0.0
6.	P0.1
7.	P0.2
8.	P0.3
9.	P0.4
10.	P0.5
11.	P0.6
12.	P0.7
13.	P3.0
14.	P3.1
15.	P3.2
16.	P3.3
17.	P3.4
18.	P3.5
19.	P3.6
20.	P3.7
21.	P2.0
22.	P2.1
23.	P2.2
24.	P2.3
25.	P2.4
26.	P2.5
27.	P2.6
28.	P2.7
29.	P1.0
30.	P1.1
31.	P1.2
32.	P1.3
33.	P1.4
34.	P1.5
35.	P1.6
36.	P1.7
37.	CANTX0
38.	CANTX1
39.	CANRX0
40.	CANRX1

**Connector J3**

Pin	Description
1.	VCC
2.	VCC
3.	GND
4.	GND
5.	P5.7
6.	P5.6
7.	P5.5
8.	P5.4
9.	P5.3
10.	P5.2
11.	P5.1
12.	P5.0
13.	P4.4
14.	P4.3
15.	P4.2
16.	P4.1
17.	P4.0
18.	/RESET
19.	AGND
20.	AGND
21.	VREF
22.	/CANIRQ
23.	CP0+
24.	CP1+
25.	CP0-
26.	CP1-
27.	DAC0
28.	DAC1
29.	AIN0
30.	AIN1
31.	AIN2
32.	AIN3
33.	AIN4
34.	AIN5
35.	AIN6
36.	AIN7
37.	AGND
38.	AGND
39.	Reserved
40.	Reserved

**NOTE:**

AGND is connected to GND via 2.2 Ohm resistor!

---

Single board computer, sub-credit card size

**CYF020**

With Silicon Laboratories C8051F020 microcontroller.

---

Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.



**<http://www.dilogic.hr>**

**DISCLAIMER:**

DILOGIC reserve the right to make changes, without notice, in the products, or/and software, described or contained herein in order to improve design or/and performance. DILOGIC assumes no responsibility or liability for the use of any of these products.

---

**DILOGIC d.o.o.**

**Zagrebacka 64**

**10410 Velika Gorica**

**CROATIA**

**Phone: +385-1-6256-168**

**Fax: +385-1-6256-169**

**e-mail: [dilogic@zg.htnet.hr](mailto:dilogic@zg.htnet.hr)**

**<http://www.dilogic.hr>**

**© Copyright DILOGIC 2003**

**all rights reserved**